

Modeling of Bias-Ply Tire Contact Length Based on Section Width, Overall Unloaded Diameter, Inflation Pressure, Vertical Load and Rotational Speed

*Siamak Akhtarkavian,
Majid Rashidi and Iraj Ranjbar*

Department of Agricultural Machinery,
Takestan Branch, Islamic Azad University, Takestan, Iran

Abstract: This study was conducted to model contact length (L) of bias-ply tire based on section width (b), overall unloaded diameter (d), inflation pressure (P), vertical load (W) and rotational speed (N). For this reason, contact length of three bias-ply tires with different section width and overall unloaded diameter were measured at three levels of inflation pressure, four levels of vertical load and six levels of rotational speed. In order to model contact length based on section width, overall unloaded diameter, inflation pressure and vertical load, a five-variable linear regression model was suggested and all the data were subjected to regression analysis. The statistical results of study indicated that the five-variable linear regression model $L = 36.20 - 2.533 b + 0.719 d - 0.647 P + 0.185 W + 0.006 N$ with $R^2 = 0.944$ may be suggested to predict contact length of bias-ply tire based on section width, overall unloaded diameter, inflation pressure, vertical load and rotational speed for a limited range of bias-ply tire sizes.

Key words: Bias-Ply Tire • Contact Length • Section Width • Overall Unloaded Diameter • Inflation Pressure • Vertical Load • Rotational Speed • Modeling

INTRODUCTION

A flexible tire has a smaller contact area on hard surface than it dose on soft ground. A rule of thumb which can be used for estimation of tire contact area is shown by equation 1 [1]:

$$A = bL \quad (1)$$

where:

A = Contact area of tire (m²)

b = Section width of tire (m)

L = Contact length of tire (m)

McKyes [1] gave an approximate method for estimating contact length of tire on hard and soft surfaces Fig. 1 as given below in equations 2 and 3, respectively:

$$L = \frac{d}{4} \quad (\text{On a hard surface}) \quad (2)$$

$$L = \frac{d}{2} \quad (\text{On a soft surface}) \quad (3)$$

where:

d = Overall unloaded diameter of tire (m)

Moreover, Wong [2] and Bekker [3] gave an approximate method for calculating contact length of tire as given below in equation 4:

$$L = 2(d\delta - \delta^2)^{0.5} \quad (4)$$

where:

δ = Deflection of tire (m)

Tire contact length is a key parameter and many equations have been developed based on tire contact length to evaluate the tractive performance of radial-ply and bias-ply tires operating in cohesive-frictional soils. Gross traction, motion resistance, net traction and tractive efficiency are predicted as a function of soil strength, tire

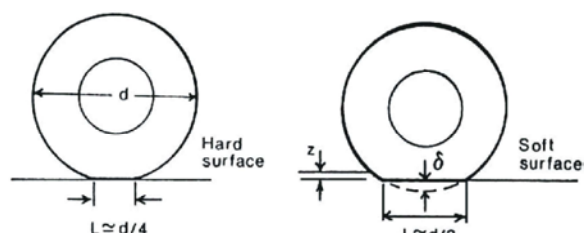


Fig. 1: Contact lengths of tires on hard and soft surfaces, adapted from McKyes [1]

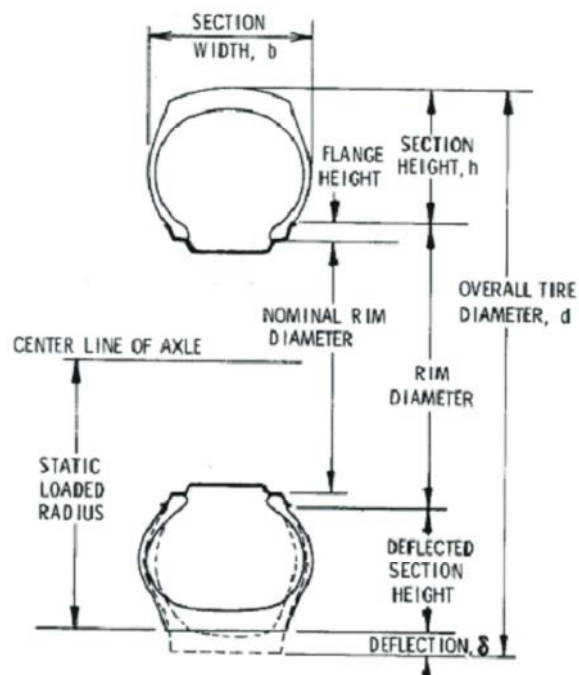


Fig. 2: Tire dimensions, adapted from Brixius [4]

load, tire slip, tire size, tire deflection and tire contact length [4]. Fig. 2 shows the tire dimensions (b , d and δ) used. The tire dimensions can be obtained from tire data book or by measuring the tire. The section width (b) is the first number in a tire size designation. The overall unloaded diameter (d) can be obtained from the tire data handbooks available from off-road tire manufacturers. The tire deflection (δ) on a hard surface is equal to $d/2$ minus the measured static loaded radius. The static loaded radius for the tire's rated load and inflation pressure is standard tire data from the tire data handbooks. It can also be obtained by measuring the tire [4, 5].

As contact length for a given tire size, inflation pressure, vertical load and rotational speed may significantly be different between radial-ply and bias-ply tires, this study was conducted to model contact length (L) of bias-ply tire based on section width (b), overall

unloaded diameter (d), inflation pressure (P), vertical load (W) and rotational speed (N) using a linear regression model.

MATERIALS AND METHODS

Tire Contact Length Test Apparatus: A tire contact length test apparatus was designed and constructed to measure contact length of tires with different sizes at diverse levels of inflation pressure, vertical load and rotational speed Fig. 3.

Experimental Procedure: For this purpose, contact length of three bias-ply tires with different section width and overall unloaded diameter were measured at three levels of inflation pressure, four levels of vertical load and six levels of rotational speed. The section width and overall unloaded diameter of three bias-ply tires are given in Table 1. Results of contact length measurement for bias-ply tires No. 1, 2 and 3 are given in Tables 2, 3 and 4, respectively.

Table 1: Section width and overall unloaded diameter of three bias-ply tires used in this study

Tire No.	Section width b (mm)	Overall unloaded diameter d (mm)
1	142	596
2	152	654
3	165	676



Fig. 3: Tire contact length measurement apparatus

Table 2: Section width, overall unloaded diameter, inflation pressure, vertical load, rotational speed and contact length (three replications) for bias-ply tire No. 1

Section width b (mm)	Overall unloaded diameter d (mm)	Inflation pressure P (kPa)	Vertical load W (kN)	Rotational speed N (rev/min)	Contact length L (mm)			
					L ₁	L ₂	L ₃	
142	596	30	100	0	106	105	106	
				600	102	102	102	
				700	106	105	106	
				800	108	107	108	
				900	110	111	110	
				1000	113	114	113	
				150	0	117	118	117
					600	112	112	113
			700		116	116	116	
			800		117	118	117	
			900		119	119	119	
			1000		123	122	122	
			200		0	126	125	126
					600	122	123	122
				700	125	125	126	
				800	126	127	127	
				900	130	131	130	
				1000	131	132	132	
				250	0	136	135	135
					600	131	131	131
			700		135	136	135	
			800		136	136	137	
			900		138	139	138	
			1000		139	140	140	
		35	100		0	103	104	103
					600	100	101	100
				700	103	102	103	
				800	105	105	105	
				900	107	107	107	
				1000	110	111	110	
				150	0	112	113	112
					600	108	107	108
			700		111	111	112	
			800		114	114	115	
			900		116	115	116	
			1000		119	120	119	
			200		0	122	121	122
					600	119	118	119
				700	121	122	122	
				800	124	124	124	
				900	127	127	127	
				1000	128	129	129	
				250	0	133	132	133
					600	129	128	129
			700		131	132	132	
			800		135	134	134	
			900		135	135	135	
			1000		137	136	137	
40	100	0	100		101	100		
		600	97		98	97		
		700	100	101	100			
		800	103	104	103			
		900	105	105	104			
		1000	106	107	107			
		150	0	110	111	110		
			600	105	105	105		
	700		109	108	109			
	800		112	113	112			
	900		113	114	114			
	1000		115	116	116			
	200		0	119	120	119		
			600	115	115	115		
		700	119	120	119			
		800	120	121	121			
		900	123	122	123			
		1000	125	126	125			
		250	0	128	129	128		
			600	124	124	125		
	700		128	127	128			
	800		130	131	130			
	900		131	132	132			
	1000		134	134	134			

Table 3: Section width, overall unloaded diameter, inflation pressure, vertical load, rotational speed and contact length (three replications) for bias-ply tire No. 2

Section width b (mm)	Overall unloaded diameter d (mm)	Inflation pressure P (kPa)	Vertical load W (kN)	Rotational speed N (rev/min)	Contact length L (mm)				
					L ₁	L ₂	L ₃		
152	654	30	100	0	120	120	121		
				600	116	115	116		
				700	120	121	120		
				800	121	122	122		
				900	125	125	125		
				1000	128	128	128		
			150	0	130	131	130		
				600	125	125	125		
				700	128	129	129		
				800	132	132	133		
				900	135	136	135		
				1000	138	138	139		
			200	0	144	145	145		
				600	140	141	140		
				700	145	145	146		
				800	147	146	147		
				900	149	149	150		
				1000	152	152	153		
			250	0	153	153	153		
				600	149	150	149		
				700	152	152	152		
				800	154	154	155		
				900	157	158	157		
				1000	159	159	160		
		35		100	0	118	118	118	
					600	115	114	115	
					700	119	119	120	
					800	122	121	122	
					900	125	125	126	
					1000	128	128	128	
					150	0	128	128	128
						600	124	124	124
						700	128	128	128
						800	130	129	130
						900	133	133	133
						1000	136	137	136
				200	0	140	141	140	
					600	135	135	136	
					700	139	140	139	
					800	142	142	143	
					900	144	144	144	
					1000	147	147	146	
				250	0	149	149	150	
					600	145	145	145	
					700	148	147	148	
					800	150	151	151	
					900	154	154	154	
					1000	156	157	157	
40		100	0	115	115	116			
			600	111	111	111			
			700	115	115	116			
			800	118	118	119			
			900	120	121	121			
			1000	123	123	124			
			150	0	124	125	124		
				600	120	120	120		
				700	124	123	124		
				800	127	127	127		
				900	129	130	130		
				1000	132	132	133		
		200	0	133	134	133			
			600	130	129	130			
			700	133	134	134			
			800	137	137	137			
			900	139	140	140			
			1000	142	143	143			
		250	0	143	144	143			
			600	139	140	140			
			700	144	144	144			
			800	147	147	147			
			900	149	150	149			
			1000	152	151	152			

Table 4: Section width, overall unloaded diameter, inflation pressure, vertical load, rotational speed and contact length (three replications) for bias-ply tire No. 3

Section width b (mm)	Overall unloaded diameter d (mm)	Inflation pressure P (kPa)	Vertical load W (kN)	Rotational speed N (rev/min)	Contact length L (mm)				
					L ₁	L ₂	L ₃		
165	676	30	100	0	108	107	107		
				600	103	103	103		
				700	106	106	105		
				800	108	108	108		
				900	111	112	111		
				1000	114	114	113		
			150	0	117	117	118		
				600	114	114	113		
				700	117	117	117		
				800	119	118	119		
				900	121	121	122		
				1000	123	123	123		
			200	0	124	124	123		
				600	120	120	121		
				700	124	123	124		
				800	125	125	126		
				900	127	127	127		
				1000	130	130	131		
			250	0	132	132	131		
				600	129	129	129		
				700	131	132	131		
				800	133	132	133		
				900	134	134	133		
				1000	135	136	136		
		35		100	0	104	104	105	
					600	100	100	100	
					700	103	103	104	
					800	105	105	105	
					900	105	106	106	
					1000	107	108	108	
					150	0	112	111	112
						600	109	109	109
						700	112	111	112
						800	114	114	115
						900	115	115	115
						1000	117	117	118
				200	0	122	122	122	
					600	118	117	118	
					700	122	122	123	
					800	125	125	125	
					900	126	127	127	
					1000	130	130	131	
				250	0	130	131	130	
					600	125	126	125	
					700	129	130	129	
					800	132	132	132	
					900	134	134	135	
					1000	136	137	136	
40		100	0	102	102	102			
			600	99	98	99			
			700	101	100	101			
			800	104	104	104			
			900	106	105	106			
			1000	108	108	109			
			150	0	112	111	112		
				600	108	108	109		
				700	112	112	112		
				800	114	115	114		
				900	115	115	115		
				1000	116	117	117		
		200	0	117	118	117			
			600	113	112	113			
			700	116	116	117			
			800	118	118	118			
			900	120	120	121			
			1000	122	123	123			
		250	0	124	125	124			
			600	120	120	120			
			700	125	124	124			
			800	127	127	127			
			900	128	129	129			
			1000	132	132	133			

Table 5: Five-variable linear regression model, p-value of independent variables and coefficient of determination (R²)

Model	p-value					R ²
	b	d	P	W	N	
L = 36.20 - 2.533 b + 0.719 d - 0.647 P + 0.185 W + 0.006 N	8.1E-265	5.9E-269	3.27E-72	0	9.74E-42	0.944

Regression Model: A typical five-variable linear regression model is shown in equation 5 [6-9]:

$$Y = C_0 + C_1X_1 + C_2X_2 + C_3X_3 + C_4X_4 + C_5X_5 \quad (5)$$

where:

- Y = Dependent variable, for example contact length of bias-ply tire
- X₁, X₂, X₃, X₄, X₅ = Independent variables, for example section width, overall unloaded diameter, inflation pressure, vertical load and rotational speed
- C₀, C₁, C₂, C₃, C₄, C₅ = Regression coefficients

To model contact length based on section width, overall unloaded diameter, inflation pressure, vertical load and rotational speed, a five-variable linear regression model was suggested.

RESULTS AND DISCUSSION

In order to model contact length of bias-ply tire based on section width, overall unloaded diameter, inflation pressure, vertical load and rotational speed, a five-variable linear regression model was suggested and all the data were subjected to regression analysis using the Microsoft Excel 2007. The five-variable linear regression model, p-value of independent variables and coefficient of determination (R²) of the model are shown in Table 5. As it is shown in Table 5, this model has a high R² value at 0.944, indicating good agreement of the experimental data. In addition, the p-value of independent variables (b, d, P, W and N) is as follows: 8.1E-265, 5.9E-269, 3.27E-72, 0 and 9.74E-42, respectively. Thus, based on the statistical results, this model is initially accepted, which is given by equation 6:

$$L = 36.20 - 2.533 b + 0.719 d - 0.647 P + 0.185 W + 0.006 N \quad (6)$$

In this model, contact length of bias-ply tire can be predicted using five-variable linear regression of section width, overall unloaded diameter, inflation pressure, vertical load and rotational speed.

CONCLUSIONS

It can be concluded that the five-variable linear regression model L = 36.20 - 2.533 b + 0.719 d - 0.647 P + 0.185 W + 0.006 N with R² = 0.944 may be suggested to predict contact length of bias-ply tire based on section width, overall unloaded diameter, inflation pressure, vertical load and rotational speed for a limited range of bias-ply tire sizes.

ACKNOWLEDGEMENTS

With special thanks to Nezam Sanat Albourz Co. and its managing director Mr. Majid Nezamabadi who helped us during design, manufacturing, renovation and testing processes.

REFERENCES

1. McKyes, E., 1985. Soil Cutting and Tillage. Elsevier Science Publishing Company Inc., New York, USA.
2. Wong, J.Y., 1978. Theory of Ground Vehicles. John Wiley and Sons, New York, USA.
3. Bekker, M.G., 1985. The effect of tire tread in parametric analyses of tire-soil systems. NRCC Report No. 24146, National Research Council of Canada.
4. Brixius, W.W., 1987. Traction prediction equations for bias ply tires. ASAE Paper No. 871622. St. Joseph, Mich.: ASAE.
5. Goering, C.E., M.L. Stone, D.W. Smith and P.K. Turnquist, 2006. Off-Road Vehicle Engineering Principles. St. Joseph, Mich.: ASABE.
6. Azadeh, S., M. Rashidi and M. Gholami, 2013. Modeling of bias-ply tire deflection based on tire dimensions, tire inflation pressure and vertical load on tire. Middle-East J. Sci. Res., 14(1): 117-121.
7. Mousavi, M., M. Rashidi, I. Ranjbar, M. Solimani Garmroudi and M. Ghaebi, 2013. Modeling of bias-ply tire contact area based on tire dimensions, tire inflation pressure and vertical load on tire using linear regression models. Am-Euras. J. Agric. and Environ. Sci., 13(5): 627-632.

8. Oroojloo, M., M. Rashidi and M. Gholami, 2013. Modeling of radial-ply tire contact area based on tire dimensions, tire inflation pressure and vertical load on tire. *Middle-East J. Sci. Res.*, 17(7): 949-954.
9. Sheikhi, M.A., M. Rashidi and M. Gholami, 2013. Modeling of radial-ply tire deflection based on tire dimensions, tire inflation pressure and vertical load on tire. *Am-Euras. Journal Agric. and Environ. Sci.*, 13(2): 222-226.