

## Simulating of Each Concrete Gravity Dam with Any Geometric Shape Including Dam-Water-Foundation Rock Interaction Using APDL

<sup>1</sup>Shiva Khosravi, <sup>2</sup>Javad Salajegheh and <sup>3</sup>Mohammad Mehdi Heydari

<sup>1</sup>Young Researchers Club, Kerman Branch, Islamic Azad University, Kerman, Iran

<sup>2</sup>Department of Civil Engineering, Shahid Bahonar University of Kerman, Kerman, Iran

<sup>3</sup>Young Researchers Club, Kashan Branch, Islamic Azad University, Kashan, Iran

**Abstract:** An efficient method is proposed to simulating geometric shape of gravity dams including dam-water-foundation rock interaction using the soft computing technique. For this purpose model of two-dimensional finite element that is included dam, reservoir and foundation be provided using the finite element software ANSYS in the most widely used APDL (Parametric Design Language) language programming. To considering 11 geometry variables, finite element analyses of gravity dams are carried. With regard to 11 geometric variables Can modeling each gravity dam and with each geometry. In order to check verify of modeling and ensured used assumption during the modeling, dam is intended in 4 different cases: 1. Dam with empty reservoir and rigid foundation. 2. Dam with empty reservoir and flexible foundation. 3. Dam with full reservoir and rigid foundation. 4. Dam with full reservoir and flexible foundation. To assess the accuracy of this modeling, the modal analysis and mode shapes of the Pine Flat, koyna and idealized triangular Dam is studied and the results are compared with other reference results. Numerical results show the merits of the suggested technique for gravity dam shape simulation. It is also found that considering the dam-water-foundation rock interaction has an important role for safely designing a gravity dam.

**Key words:** Concrete gravity dam-reservoir-foundation rock interaction • Geometry shape variables • Natural frequency • APDL/finite element method

### INTRODUCTION

Gravity dams are fluid-structure-soil interaction problems. It is obvious that the foundation soil and water reservoir affect the dynamic response of gravity dams during earthquakes. Many factors have influence the dynamic response concrete gravity dams against earthquake motion. Some of these factors included dam-reservoir-foundation interaction, sediments at the bottom of the reservoir and nonlinear behavior of concrete gravity dams. Usually to compute the dynamic response of the dam, the concrete dam and the foundation rock are modeled by standard finite elements, whereas for the interaction effects of the water, there are several methods to investigate the dynamic response of the mentioned systems. The dam reservoir interaction problems can be analyzed using the three famous approaches: Westergaard approach: the dynamic effect of the reservoir is modelled as added masses. Eulerian approach: since in

this approach the displacements are the variables in the structure and the pressures are the variables in the fluid, a special purpose computer program is required for the solution of the coupled systems. Lagrangian approach: In this approach the behavior of the fluid and structure is expressed in terms of displacements. For that reason, compatibility and equilibrium are automatically satisfied at the nodes along the interfaces between the fluid and structure. This makes a Lagrangian displacement based fluid finite element very desirable; it can be readily incorporated into a general purpose computer program for structural analysis; because special interface equations are not required. The first presented solution was based on the added mass method. In this approach, the only effect of fluid was the portion of fluid mass which was added to the solid. The stiffness and damping effects of the fluid was ignored. In this state, the solid was solved without considering the fluid and the solid mass matrix was modified by a portion of fluid mass. This method was

used to analyze stiff and flexible structures such as dams and water reservoir. In general, this method gives overestimated results, but is still useful for pre-analysis procedures. The first research on the analysis of concrete gravity dam has been done by Westergaard in 1930 and its analysis response for hydrodynamic pressure on the dam face was clear [1]. The original added mass concept is based on simplifying assumptions of vertical upstream face, rigid dam section and incompressible water but was modified by Kuo (1982) for other orientations of the upstream face and in the linear and nonlinear responses dam-reservoir system approximated dam equation by adding some mass [2]. Both approaches, however, ignore compressibility of water and the energy loss due to radiation of pressure waves in the upstream direction and due to reflection and refraction at the reservoir bottom. Chopra and his coworkers (1981) the complete system is considered as composed of three substructures, the dam, represented as a finite element system, the fluid domain, as a continuum of infinite length in the upstream direction and the foundation rock region as a viscoelastic half-plane. The foundation region may also be idealized as a continuum or as a finite element system. The continuum idealization permits the continuum idealization permits accurate modeling of the structure-foundation interaction when similar materials extend to large depths. For sites where soft rock or soil overlies harder rock at shallow depths, a finite element idealization of the foundation region is more appropriate, but at low depths the rock and rigid layer should be modeled with finite element method [3].

In addition to dam-reservoir-foundation interaction, the effect of seismic waves absorption by the reservoir bottom sediments on the response of the dam have been studied. Dam-reservoir-foundation-sediment interaction has been investigated by many researchers. Among other, Fenves and Chopra (1984, 1985) presented a model which includes reservoir bottom absorption for the seismic analysis of gravity dam by the means of an absorbing boundary condition. The study concluded that the sediment could significantly reduce the hydrodynamic pressure effect on the seismic response of the dam [4,5].

Singhal (1991), the effect wave reflection coefficient ( $\alpha$ ) on maximum values crest displacement and maximum stress at the heel of the dam investigated. The ( $\alpha$ ) is the ratio of the amplitude of the reflected hydrodynamic pressure wave to the amplitude of a vertical propagating pressure wave incident on the reservoir bottom ( $0 < \alpha < 1$ ). A value of  $\alpha = 1$  indicates that pressure waves are

completely reflected and smaller values of  $\alpha$  indicate increasingly absorptive materials. The results show that increasing the wave reflection coefficient increases the maximum values crest displacement and maximum stress at the heel of the dam [6].

Many researches, studied this problem using the computer programs for analysis 2D Finite Element Method of gravity dams. For example the computer program EAGD-84 (Fenves and Chopra, 1984) is a two-dimensional finite element method of analysis for gravity dams which includes dam-water interaction with water compressibility, dam-foundation rock interaction and reservoir bottom absorption due to reservoir bottom sediments [7]. Lotfi (2003, 2007) a new technique is proposed for earthquake analysis of concrete gravity dams, which is referred to as decoupled modal approach. A special computer program "MAP-76" is used as the basis of this study. The program was already capable of analyzing a general dam-reservoir system by direct approach in the time domain and frequencies of the dam - reservoir found. The main advantage of this modal technique is that it employs eigenvectors of the decoupled system, which can be easily obtained by standard eigen-solution routines [8,9]. Akkose (2010), the seismic nonlinear behavior of the concrete gravity dams to earthquake ground motion near and far fault including dam-reservoir-sediment-foundation rock interaction is investigated and using a computer program NONSAP modified System frequencies dam - reservoir received. The program is modified for elasto-plastic analysis of fluid-structure systems and employed in the response calculations [10].

In this paper, we study the dam-reservoir-foundation interaction during an earthquake. For this purpose model of two-dimensional finite element that is included dam, reservoir and foundation be provided using the finite element software (ANSYS). In order to check verify of modeling and ensured used assumption during the modeling, dam is intended in 4 different cases: 1. Dam with empty reservoir and rigid foundation. 2. Dam with empty reservoir and flexible foundation. 3. Dam with full reservoir and rigid foundation. 4. Dam with full reservoir and flexible foundation. The modal analysis and mode shapes results of the Pine Flat, koyna and idealized triangular Dam is studied and the results obtained, verify the accuracy of the modeling against available reference results.

**Finite Element Model of Dam-Reservoir-Foundation System:** To modeling concrete gravity dam-reservoir-foundation problem using the finite element procedure,

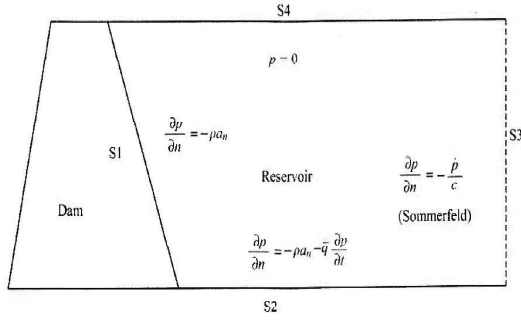


Fig. 1: The boundary conditions of the fluid domain [12]

the discretized dynamic equations of the fluid and structure including dam and its foundation need to be considered simultaneously to obtain the coupled fluid-structure-foundation.

**The Discretized Fluid Equation:** Assuming that water is linearly compressible and neglecting its viscosity, the small amplitude irrotational motion of the water is governed by the two-dimensional wave equation [11]:

$$\nabla^2 p = \frac{1}{c^2} \frac{\partial^2 p}{\partial t^2} \quad (1)$$

Where  $c$  is the speed of pressure wave,  $p$  is the acoustic hydrodynamic pressure;  $t$  is time and  $\nabla^2$  is the two-dimensional Laplace operator.

As shown in Fig. 1, some boundary conditions may be imposed on the fluid domain as follows:

(S1), at the fluid-structure interface:

$$\frac{\partial p}{\partial n} = -\rho a_n \quad (2)$$

Where  $n$  is a unit normal vector to the interface,  $a_n$  is the normal acceleration on the interface and  $\rho_w$  is the mass density of water.

(S2), at the bottom of the fluid domain:

$$\frac{\partial p}{\partial n} = -\rho a_n - \bar{q} \frac{\partial p}{\partial t} \quad (3)$$

Where  $\bar{q}$  is the damping coefficient characterizing the effects of absorption of hydrodynamic pressure waves at the reservoir boundary [4] and  $\alpha$  is the wave reflection coefficient, which represents the ratio of the amplitude of the reflected wave to that of the normally incident pressure wave.  $\alpha$  is related to  $\bar{q}$  by the following expressions:

$$\alpha = \frac{1 - \bar{q}c}{1 + \bar{q}c} \quad (4)$$

It is believed that a Value from 1 to 0 would cover the wide range of materials encountered at the boundary of actual reservoirs. The value of the wave reflection coefficient  $\alpha$  that characterizes the reservoir bottom materials should be selected based on their actual properties, not on properties of the foundation rock. Materials on the reservoir bottom has great influence in absorbing of earthquake waves and decreases the system response under the vertical component of the earthquake and this effect is also important for horizontal component. (S3), at the far-end of the fluid domain a Sommerfeld-type radiation boundary condition [11] may be implemented, namely

$$\frac{\partial p}{\partial n} = -\frac{1}{c} \frac{\partial p}{\partial t} \quad (5)$$

(S4), at the free surface when the surface wave is neglected, the boundary condition is easily defined as:

$$P = 0 \quad (6)$$

Eqs. (2)- (6) can be discretized to get the matrix form of the wave equation as[13]:

$$M_f \ddot{P}_e + C_f \dot{P}_e + K_f P_e + \rho_w Q^T (\ddot{u}_e + \ddot{u}_g) = 0 \quad (7)$$

Where  $M_f$ ,  $C_f$  and  $K_f$  are the fluid mass, damping and stiffness matrices, respectively and  $P_e$ ;  $\ddot{u}_e$  and  $\ddot{u}_g$  are the nodal pressure, relative nodal acceleration and nodal ground acceleration vectors, respectively. The term  $\rho_w Q^T$  is also often referred to as coupling matrix.

**The Discretized Structural Equation:** The discretized structural dynamic equation including the arch dam and foundation rock subject to ground motion can be formulated using the finite-element approach as:

$$M_s \ddot{u}_e + C_s \dot{u}_e + K_s u_e = -M_s \ddot{u}_g + Q P_e \quad (8)$$

Where  $M_s$ ,  $C_s$  and  $K_s$  are the structural mass, damping and stiffness matrices, respectively,  $u_e$  is the nodal displacement vector with respect to ground and the term  $Q P_e$  represents the nodal force vector associated with the hydrodynamic pressure produced by the reservoir.

**The Coupled Fluid-Structure-Foundation Equation:** Eqs. (7) and (8) describe the complete finite-element discretized equations for the dam-water-foundation rock interaction problem and can be written in an assembled form as:

$$\begin{bmatrix} M_s & 0 \\ M_{fs} & M_f \end{bmatrix} \begin{Bmatrix} \ddot{u}_e \\ \ddot{p}_e \end{Bmatrix} + \begin{bmatrix} C_s & 0 \\ 0 & C_f \end{bmatrix} \begin{Bmatrix} \dot{u}_e \\ \dot{p}_e \end{Bmatrix} + \begin{bmatrix} K_s & K_{fs} \\ 0 & K_f \end{bmatrix} \begin{Bmatrix} u_e \\ p_e \end{Bmatrix} = \begin{Bmatrix} -M_s \ddot{u}_g \\ -M_{fs} \ddot{u}_g \end{Bmatrix} \quad (9)$$

Where  $K_{fs} = -Q$  and  $M_{fs} = \rho_w Q r$ .

Eq. (9) expresses a second order linear differential equation having unsymmetrical matrices and may be solved by Means of direct integration methods. In general, the dynamic equilibrium equations of systems modelled in finite elements can be expressed as:

$$M_c \ddot{u}_c + C_c \dot{u}_c + K_c u_c = F(t) \quad (10)$$

Where  $M_c$ ,  $C_c$ ,  $K_c$  and  $F(t)$  are the structural mass, damping, stiffness matrices and dynamic load vector, respectively.

#### Modelling of Dam-Reservoir-Foundation System:

The objective of this work is to study the effects of dam-reservoir-foundation interaction on modal behaviour of gravity dams. The computer program used to modelling and analyzes the dam-reservoir- foundation system was ANSYS (APDL language programming). Pine flat, koyna and idealized triangular Dams are analyzed to evaluate the accuracy and efficiency of the present model finite element. For dam body modelling four nodes element of Plane 42 (structural 2D solids) are used. The dam and foundation elements are in a state of plane-stress. The reservoir is assumed to be of uniform shape and four-noded FLUID29 element is used to discretize the fluid medium and the interface of the fluid-structure interaction problem. The element has four degrees of freedom per node: translations in the nodal x, y and z directions and pressure. The translations, however, are active only at the nodes that are on the interface. In order to consider the damping effect arising from the propagation of pressure waves in the upstream direction, instead of a Sommer field-type radiation boundary condition, the reservoir length is selected as one and a half times the reservoir depth and zero pressure is imposed on all nodes of the far end boundary. In this study, foundation rock treating as a linearly elastic structure is represented via a four-noded Plane 42 element as well. The foundation rock is assumed to be massless in which only the effects of foundation flexibility are considered and the inertia and damping effects of the foundation rock are neglected. The foundation rock is extended to one and a half times dam height in upstream, downstream and downward directions [14].

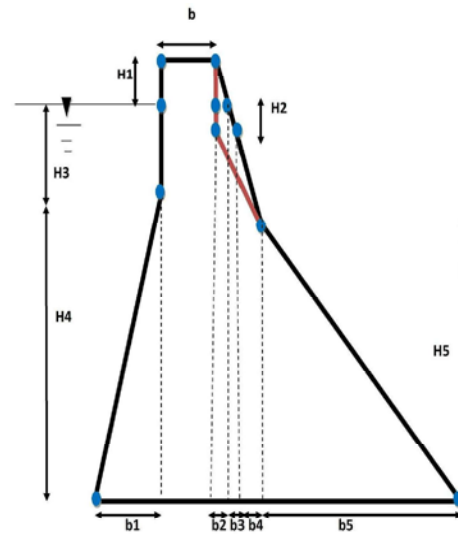


Fig. 2: The geometry variable of gravity dam [15]

The dam body is assumed to be homogeneous, isotropic and elastic properties for mass concrete. The foundation rock is idealized as a homogenous, isotropic media. The foundation model was constructed using solid elements arranged on semicircles having a radius one and a half times base of the dam. The impounded water is taken as inviscid and compressible fluid.

In the present study, to create the gravity dam geometry, 11 geometry variables are considered. With the defined geometry variables in APDL ansys a 2D shape of gravity dam body is created. Shape of the dam with 11 geometry variables is presented in Fig. (2) [15].

#### RESULTS AND DISCUSSION

For analyzed of the selected dam four cases related to various conditions of dam-water-foundation rock interaction problem are considered as follows:

- Case 1: Dam with empty reservoir and rigid foundation.
- Case 2: Dam with empty reservoir and flexible foundation.
- Case 3: Dam with full reservoir and rigid foundation.
- Case 4: Dam with full reservoir and flexible foundation.

In order to validate the finite-element model with the employed assumptions, the first natural frequency of the symmetric mode of the dam for Cases 1- 4 are determined. The results of the present work are compared with those reported in the literature and other reference. The errors between exact and approximate frequencies are also calculated using the following equation:

Table 1: The geometry variables of Pine Flat dam

Parameter	b	b1	b2	b3	b4	b5	H1	H2	H3	H4	H5
Value (ft)	32	16.75	0	0	31.57	234	19	14	46	335	300
Value (m)	9.7536	5.1054	0	0	9.6225	71.3232	5.7912	4.2672	14.0208	102.108	91.44

Table 2: The material properties of the dam, water and foundation rock

Dam body	Elasticity modulus of concrete	22,400 MPa
	Poisson's ratio of concrete	0.20
	Mass density of concrete	2430 kg m <sup>-3</sup>
Water	Mass density of water	1000 kg m <sup>-3</sup>
	Speed of pressure wave	1440 m s <sup>-1</sup>
	Wave reflection coefficient	0.817
Foundation rock	Elasticity modulus of foundation rock	68,923 MPa
	Poisson's ratio of foundation rock	0.3333
	Mass density of foundation rock	0.00

Table 3: A comparison of the natural frequencies from the FE model with the literature

Case	Foundation	Reservoir	Natural frequency (Hz)		
			Chopra [17]	The present work	Error (%)
1	Rigid	Empty	3.1546	3.152	0.082
2	Rigid	Full	2.5189	2.522	0.123
3	Flexible	Empty	2.9325	2.930	0.085
4	Flexible	Full	2.3310	2.383	2.180

Table 4: The geometry variables of Koyna dam

Parameter	b	b1	b2	b3	b4	b5	H1	H2	H3	H4	H5
Value (m)	14.80	0.00	1.3713	1.45987	1.61837	50.75	11.25	11.975	52.75	39.0	66.50

Table 5: A comparison of first four natural frequencies from the FE model with the literature

Mode number	Natural frequency (Hz)		
	Reference [18]	The present work	Error (%)
1	3.002	3.01	0.026
2	7.953	8.00	0.590
3	10.848	10.855	0.064
4	15.640	15.803	1.042

Table 6: The geometry variables of idealized triangular Dam

Parameter	b	b1	b2	b3	b4	b5	H1	H2	H3	H4	H5
Value (m)	97.536	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	121.92

Table 7: A comparison of first four natural frequencies from the FE model with the literature

Mode number	Natural frequency (Hz)		
	Reference [22]	The present work	Error (%)
1	3.797	3.805	0.210

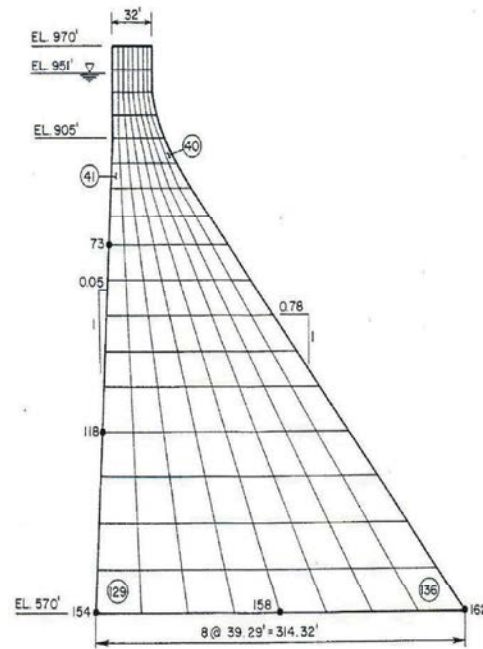


Fig. 3: Dimensions of the tallest monolith of Pine Flat dam [16, 17]

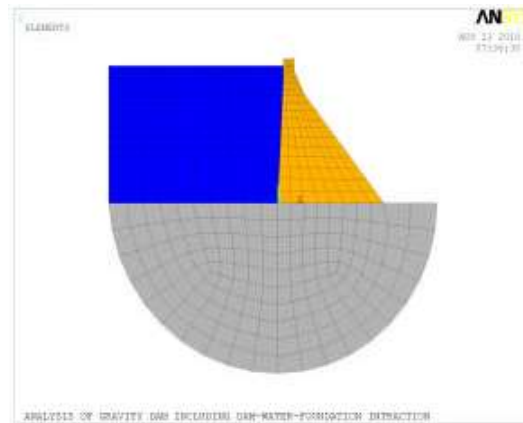


Fig. 4. Finite-element model of Pine Flat dam-water-foundation rock system [15]

$$error = \left| \frac{fr_{ap} - fr_{ex}}{fr_{ex}} \right| \times 100 \quad (11)$$

Where  $fr_{ap}$  and  $fr_{ex}$  represent the approximate and exact frequencies, respectively.

**Finite-Element Model of Pine Flat Dam:** In this section, the analysis of Pine Flat Dam is considered as a verification example. The dam is 121.92 m high, with the crest length of 560.83 m and its basis has a length of 96.80 m. It is located on the King's River near Fresno, California. A (2D) finite element model with 162 nodes and 136 plane elements (PLANE 42) is used to model body dam. (Fig.3).

An idealized model of Pine Flat dam-water-foundation rock system is simulated using the finite-element method as shown in Fig. 4. The geometry variables of dam are given in Table 1.

The material properties of the dam, water and foundation rock are given in Table 2 [16, 17].

The natural frequencies for Cases 1-4 from the finite element model [15] and the literature are given in Table 3 [17]. It can be observed that a good conformity has been achieved between the results of present work with those of reported in the literature [17]. Also, the very small percentage error showed excellent accuracy of the proposed model for dam-reservoir-foundation system.

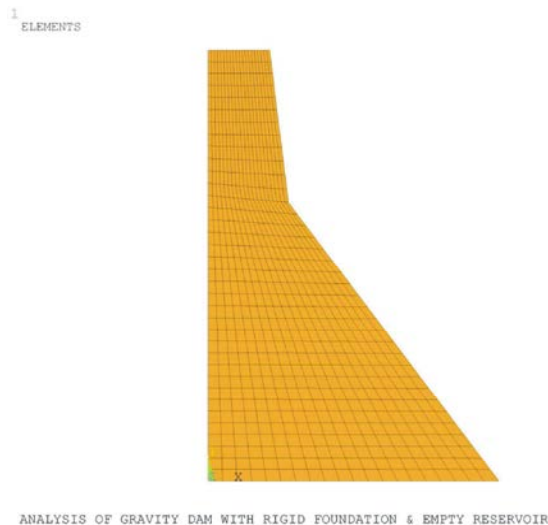
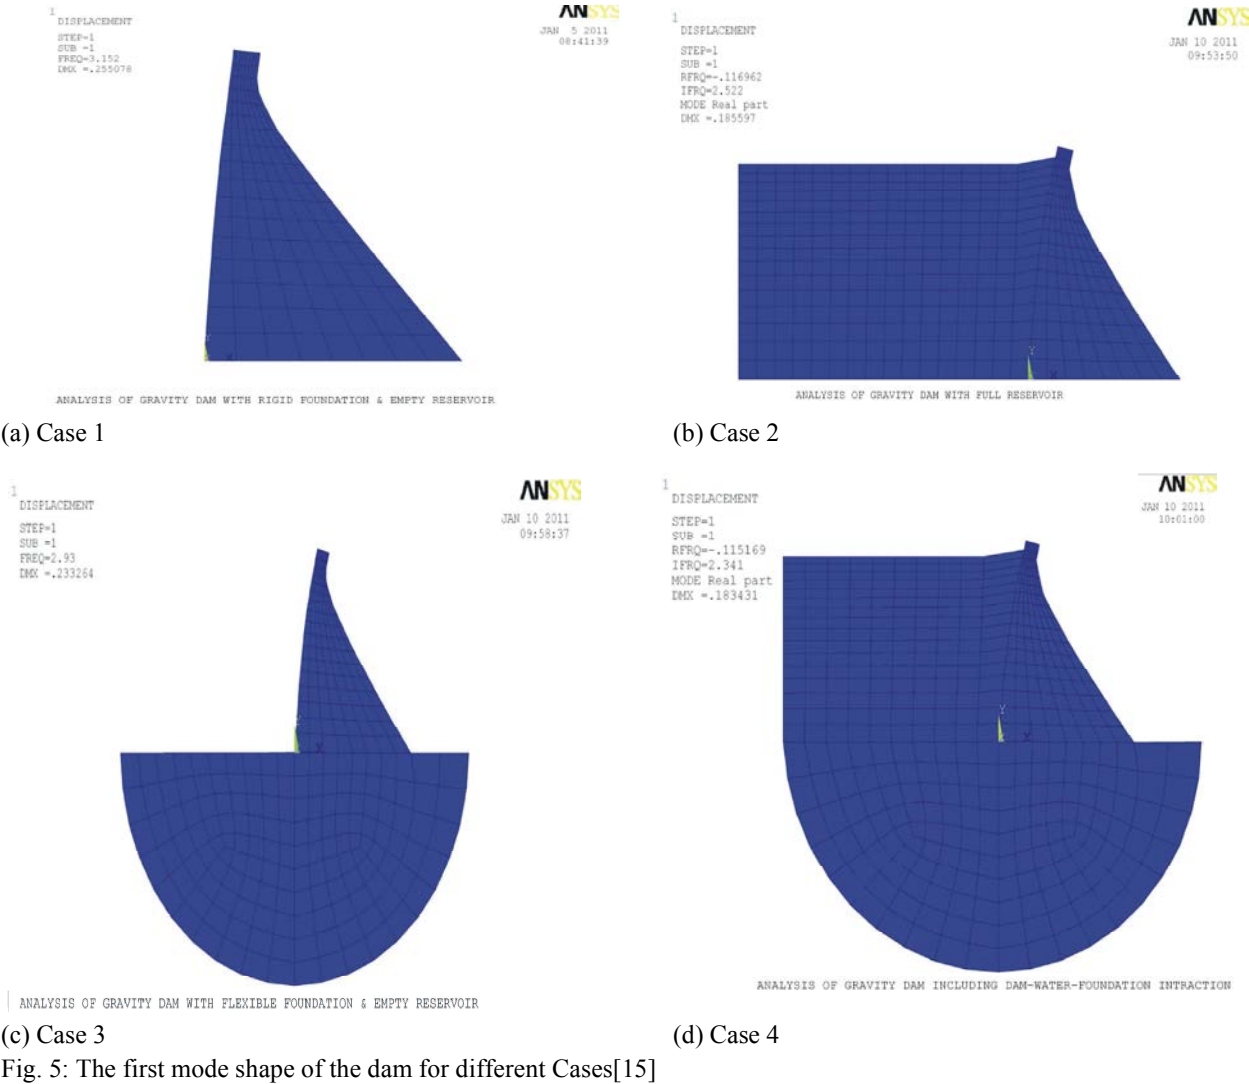


Fig. 6: Finite-element model of Koyna dam (Dam with empty reservoir and rigid foundation) [15]

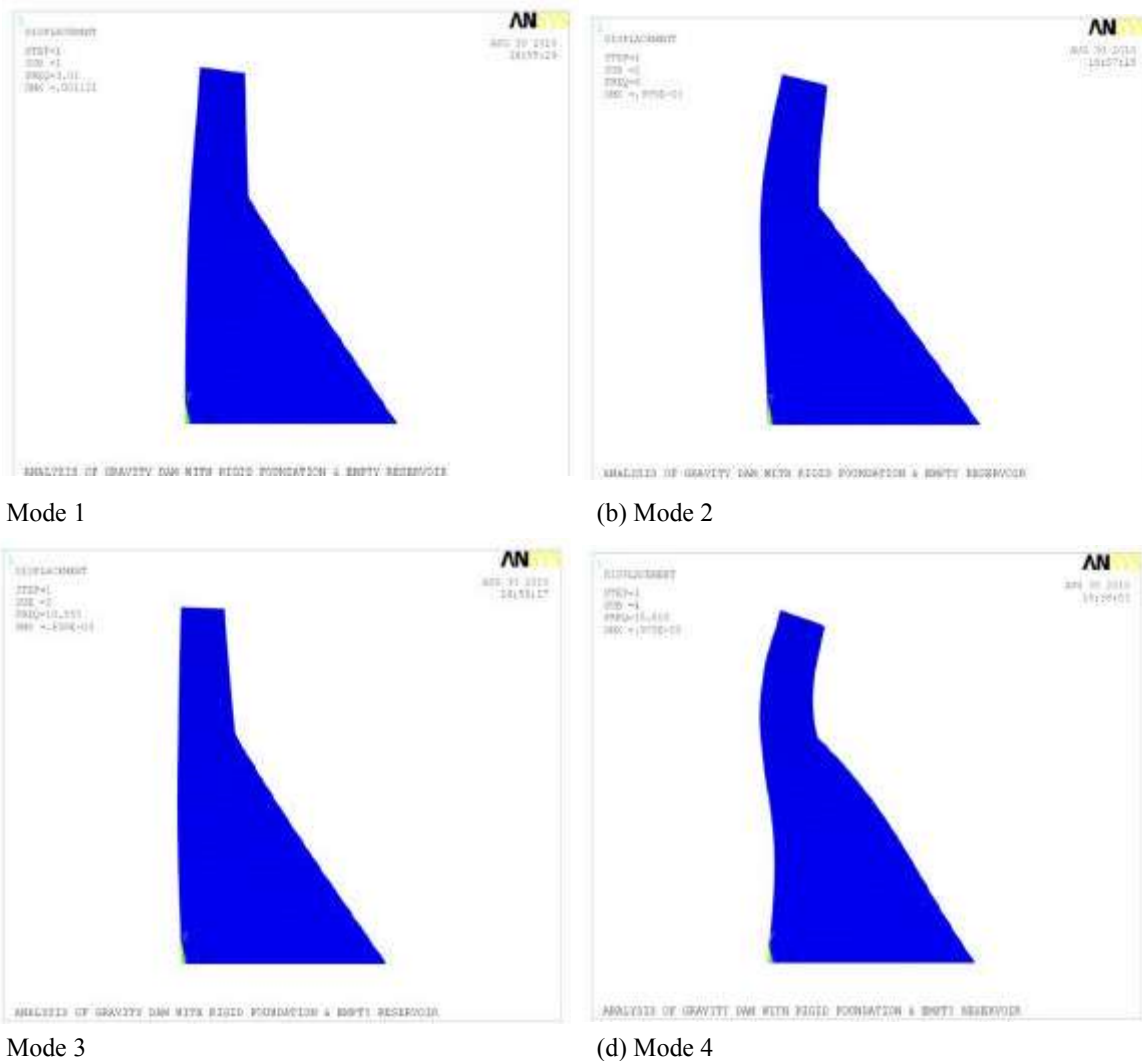


Fig. 7: The first four mode shape of the dam for Case 1[15]

The first mode shape of the dam for different Cases is displayed in Fig. 5.

**Finite-Element Model of Koyna Dam:** Koyna concrete dam (Fig.6) In Maharashtra, India, has been chosen for the finite element modeling using Ansys only in case 1 (Dam with empty reservoir and rigid foundation). The dam is 103m high; width of the dam base is 70m and crest width is 14.8m [18].

The material properties of the dam are modulus of elasticity, mass density and Poisson's ratio which are 31027MPa, 2354 kg/m<sup>3</sup> and 0.2, respectively. The geometry variables of dam are given in Table 4.

The first four natural frequencies of dam from the finite element model [15] and the Reference are listed in Table 5 [18].

The first four mode shape of the dam for Case 1 (Dam with empty reservoir and rigid foundation) is displayed in Fig. 7.

**Finite-Element Model of Idealized Triangular Dam:** An idealized triangular dam with vertical upstream face and a downstream slope of 1:0.8 is considered on a rigid foundation under an empty reservoir condition [19]. The physical and mechanical properties involved here are the concrete mass density (2643 kg/m<sup>3</sup>), the concrete poisson's ratio (0.2) and the concrete Elasticity modulus (27570MPa). The geometry variables of dam are given in Table 6 [20, 21].

The first four natural frequencies of dam from the finite element model [15] and the Reference are listed in Table 7 [22].



The first mode shape of the dam for Case 1 (Dam with empty reservoir and rigid foundation) is showed in Fig. 8.

It can be observed that a good conformity has been achieved between the results of present work with those of reported in the literature in the previous sections (4-2 and 4-3). Also, the very small percentage error showed excellent accuracy of the proposed model for dam with empty reservoir and rigid foundation.

## CONCLUSION

In the present study, an efficient procedure is developed to modeling the geometry shape of Concrete gravity dams considering dam-reservoir-foundation rock interaction with employing real values of the geometry variables. To create the gravity dam geometry, 11 geometry variables are considered. With the defined geometry variables in APDL/ANSYS, any 2D shape of gravity dam body is created. To achieve this aim, a 2D finite element model has been established for the modal analysis of Concrete gravity dams -reservoir-foundation rock system with APDL language.

In order to assess the high capability of the proposed methodology for gravity dam shape modelling, an actual gravity dam is selected and is implemented for four design cases involved the various conditions of the interaction problem. The results of first natural frequency for four design cases are compared with those of reported in literature and its performance is verified.

It is observed that both the gravity dam-water and gravity dam-foundation rock interactions have an important role in the design of arch dams and neglecting these effects can lead to an improper design. Also, it can be observed that when the reservoir is empty and the foundation is rigid (Case 1) main frequency of the dam is maximal. Furthermore, a minimum value for the main frequency is obtained when the dam-water-foundation rock interaction (Case 4) is considered.

## REFERENCES

- Westergaard, H.M., 1933. Water pressures on dams during earthquakes. Transactions of ASCE 98, 418-427.
- Kuo, J.S.H., 1982. Fluid-structure interactions: Added mass computation for incompressible fluid, UCB/EERC-82/09 Report. University of California, Berkeley, USA,
- Chopra, A.K., 1981. Chakrabarti P. Earthquake response of concrete gravity dams including dam-water- foundation rock interaction, Earthquake Engineering and Structural Dynamics, 9: 363-383.
- Fenves, G. and A.K. Chopra, 1983. Effects of reservoir bottom absorption on earthquake of concrete gravity dams, Earthquake Engineering and Structural Dynamics, 11: 809-829.
- Fenves, G. and A.K. Chopra, 1984. Earthquake analysis of concrete gravity dams including reservoir bottom absorption and dam-water-foundation rock interaction, Earthquake Engineering and Structural Dynamics, 12: 663-680.
- Singhal, A.C., 1991. Comparison of computer codes for seismic analysis of dams, Computers & Structures, 38: 107-112.
- Fenves, G. and A.K. Chopra, 1984. EAGD-84: A computer program for earthquake analysis of concrete gravity dams, UCB/EERC-84/11 Report. University of California, Berkeley, USA,
- Lotfi, V., 2003. Seismic analysis of concrete gravity dams by decoupled modal approach in time domain, Electronic J. Structure Engineering, 3: 102-116.
- Samii, A. and V. Lotfi, 2007. Comparison of coupled and decoupled modal approaches in seismic analysis of concrete gravity dams in time domain, Finite Elements in Analysis and Design, 43: 1003-1012.
- Akkose, M. and E. Simsek, 2010. Non-linear seismic response of concrete gravity dams to near-fault ground motions including dam-water-sediment-foundation interaction, Applied Mathematical Modelling, 34: 3685-3700.
- Kucukarslan, S., B. Coskun and B. Taskin, 2005. Transient analysis of dam-reservoir interaction including the reservoir bottom effects, J. Fluids and Structures, 20: 1073-1084.
- Kucukarslan, S., 2003. Dam -reservoir interaction including the reservoir bottom effects in time domain, 16th ASCE engineering mechanics conference, pp: 16-18.
- Seyedpoor, S.M., J. Salajegheh and E. Salajegheh, 2009. Shape optimal design of arch dams including dam-water-foundation rock interaction using a grading strategy and approximation concepts, Applied Mathematical Modelling, 34: 1149-1163.
- Seyedpoor, S.M., 2009. "Optimum Design of arch dams Using Approximation Methods", PhD Thesis, Department of Civil Engineering, University of Kerman, Kerman, Iran,

15. Khosravi, S.H., 2011. "Optimum of Concrete gravity dams with dynamic constraints and considering dam-reservoir-foundation rock interaction." Master of Science thesis, Islamic azad University of Kerman,
16. Vargas-Loli, L. and G. Fenves, 1989. Effects of concrete cracking of the earthquake response of gravity dams, *Earthquake Engineering and Structural Dynamics*, 18: 575-592.
17. Chopra, A.K. and P. Chakrabarti, 1980. Earthquake response of concrete gravity dams including hydrodynamic foundation interaction effects, UCB/EERC-80/01 Report. University of California, Berkeley, USA,
18. Sarkar, R., 2007. Influence of reservoir and foundation on the nonlinear dynamic response of concrete gravity dams, *ISIT J. Earthquake Technol.*, 44: 377-389.
19. Arjomandi, S.A. and V. Lotfi, 2007. Dynamic analysis of structures in frequency domain by utilizing a new set of ritz vectors, *Journal of faculty of engineering (University of Tehran)*; 41(1 (103)): 1-10.
20. Fathi, A., 2004. "Dynamic analysis of weight concrete dams by using combination of finite elements method and boundary element method." Master of Science thesis, Amir Kabir, University of Technol.,
21. EAGD-84, Available from: <<http://nisee.berkeley.edu/elibrary/Software/EAGD84PZIP>>.
22. EAGD-PC, Available from: <<http://nisee.berkeley.edu/elibrary/Software/EAGD84PCZIP>>.